

TSDG-0001xx

24 GHz Radar Target Simulator

Datasheet

Project Number:

...

SMS Project Number:

...

Project Title:

TSDG

Keyword(s):

Datasheet

Date:

October 9, 2018

Document:

TSDG-0001xx_Datasheet.docx

CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.

1 Contents

1	Contents.....	2
2	Reference Documents	3
3	Document History	4
4	User Safety Warning Information	5
5	Datasheet.....	7
5.1	Technical Overview	7
5.2	Block Diagram	8
5.3	Connections.....	9
5.4	Specifications.....	9
5.5	Typical Loss Budget Calculation	12
5.6	Product ID.....	13
6	Important Legal Disclaimer Notice.....	14
7	Contact	15

CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.

2 Reference Documents

Nr.	Document	Comments
[1]	TSDG-0001xx_Users_Manual.docx	User's Manual
[2]	KTSDG-02xxxx_Datasheet.docx	Datasheet of previous generation of Doppler generators "KTSDG-02"
[3]		
[4]		

Table 1: Reference Documents

CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.

3 Document History

Date	Author	Action
2016-08-31	SBR	New datasheet for TSDG
2016-11-24	SBR	Added 1m minimum target distance
2018-10-09	TSO	User Safety Warning Information added

Table 2: Document History

CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.

4 User Safety Warning Information

Read the instructions carefully before you start to work.

Installation

Please observe the following advices when installing and connecting the devices:

- Read the user manual carefully and follow all instructions for installation given there.
- Only use provided or approved equipment for installation.
- Only skilled and instructed persons shall install and connect the devices. Proper experience in working with mains voltage, electrical and electronic devices is required.
- Don't wire any connections while power is applied to the device.
- Mount the devices carefully to prevent the devices from shifting or dropping.
- Make sure that your installation methods are in accordance with local safety policy and procedures and company practices.

Technical service

Only use provided or approved equipment for operation.

Persons other than authorized and approved electrical technicians shall NOT attempt to connect this unit to a power supply, Traffic Management Interface Board and/or other controllers, as there is a risk of electrical shock by unsafe handling of the power source.

Do not attempt to service or repair this unit.

- No user-maintainable parts are contained within the device.
- To avoid electrical shock, do not remove or open the cover.
- Unauthorized opening will void all warranties.
- Smartmicro is not liable for any damages or harms caused by unauthorized attempts to open or repair the device.

Radiation

This device generates radio frequency energy.

There are strict limits on continuous emission power levels. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

- Human exposure to transmitted waves from this device is generally considered as safe.
- Nevertheless, it is considered good practice that humans are not subject to higher radiation levels than necessary.

CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.

Operation

Transmission of radio frequency is remotely controlled by a computer and stops at the latest when disconnecting it from power.

Connecting the device to a TMIB or another controller will not change the transmitted signal.

Do not operate the device if the device itself or any cables are damaged.

The sensors are designed to work under laboratory conditions (temperature, humidity, dust, ...). Do not expose the device to any liquids or try to insert foreign objects. For recalibration please contact Smartmicro.

CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.

5 Datasheet

The TSDG-0001xx is a highly integrated, 19" rack mountable radar target simulator, which is capable of simulating a single target at 24 GHz with programmable Doppler shift and RCS. All settings can be programmed over Ethernet. The TSDG receives the radar sensor signal via an antenna connected to its input, a programmable synthesizer converts the frequency down to an intermediate frequency (IF). A second individually programmable synthesizer converts the frequency back up before it gets transmitted back to the radar sensor by a second antenna.

The delta frequency between the two synthesizers defines the Doppler shift of the signal. The RCS of a radar target can also be adjusted by programming of a variable attenuator inside the TSDG. Real time delays can be realized with the TSDG by inserting a coaxial cable or fiber optic media converter into the IF signal path.

With an external frequency converter, the TSDG-0001xx can easily be upgraded to work with sensors operating between 76 - 81 GHz.

5.1 Technical Overview

- Precise single target simulation.
- Customized signal delay times possible.
- Programming of radar target RCS in 0.5dB steps.
- Programmable Doppler frequency resolution in 12 Hz steps.
- Easy to use GUI Interface.
- Ethernet controlled.
- Optional extension for use at 76 - 81 GHz available.



Front Panel View




Rear Panel View

CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.

5.2 Block Diagram

Recommended measurement setup diagram:

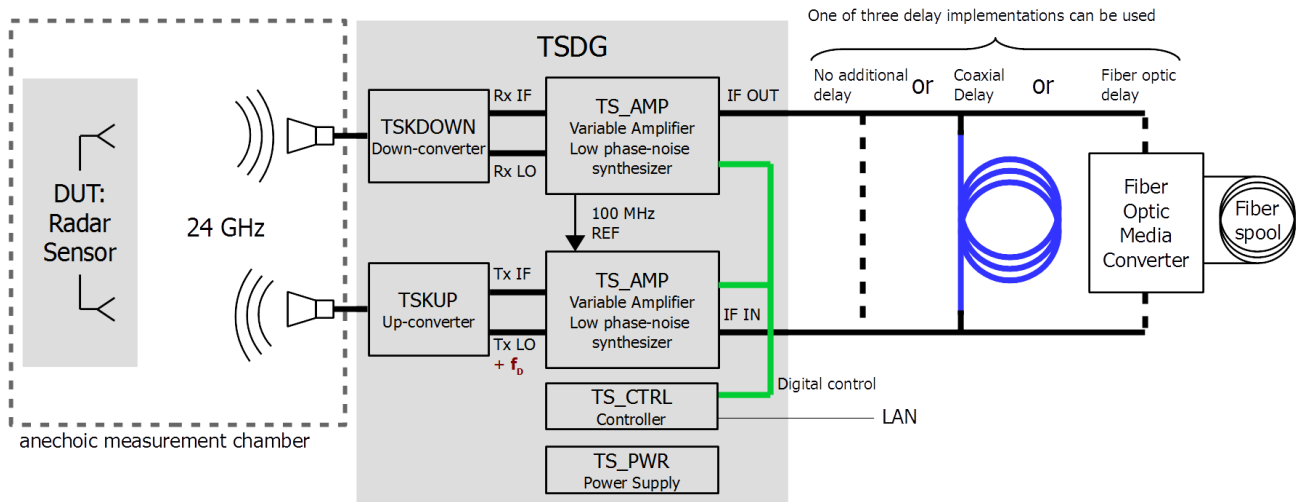

The TSDG is split into a receiver path and a transmitter path, each using a frequency converter and a variable gain amplifier. The receiver path comprises the modules TSKDOWN and TS_AMP. The transmitter path comprises the modules TSKUP and a second TS_AMP.

In the receiver path the radar waveform is down-converted to an intermediate frequency centered at $f_{if}=6.525$ GHz. The IF signal is accessible on an SMA connector at the output of the receiver chain, labelled "IF OUT". In order for the TSDG to function, "IF OUT" must be connected to the "IF IN" SMA connector of the transmitter path. A wide variety of connections are possible:

1. To get the minimum target distance of the TSDG itself with no additional delay, a short coaxial "jumper" cable can be installed.
2. A longer coaxial cable can be connected here to simulate target distances of up to 15m.
3. For distances over 15m, a fiber optic media converter may be used. Target distances of 10 km and beyond are attainable in this configuration.

The customer is free to connect his own delay or, if desired, have Smartmicro recommend and procure components for a particular application.


After the IF signal is fed back into the TSDG it enters the transmitter chain. A variable gain amplifier compensates for any attenuation introduced into the IF signal by external equipment, like the previously mentioned fiber optic media converter. The up-converter shifts the signal back up into the 24 GHz band and adds the selected Doppler shift f_D .

The TSDG if built from individual modules that mount into a 19" subrack frame. This modular design allows for simple upgrades to additional frequency bands. All RF and IF signals are available on the rear panel of the unit for monitoring and expansion.


CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.

5.3 Connections

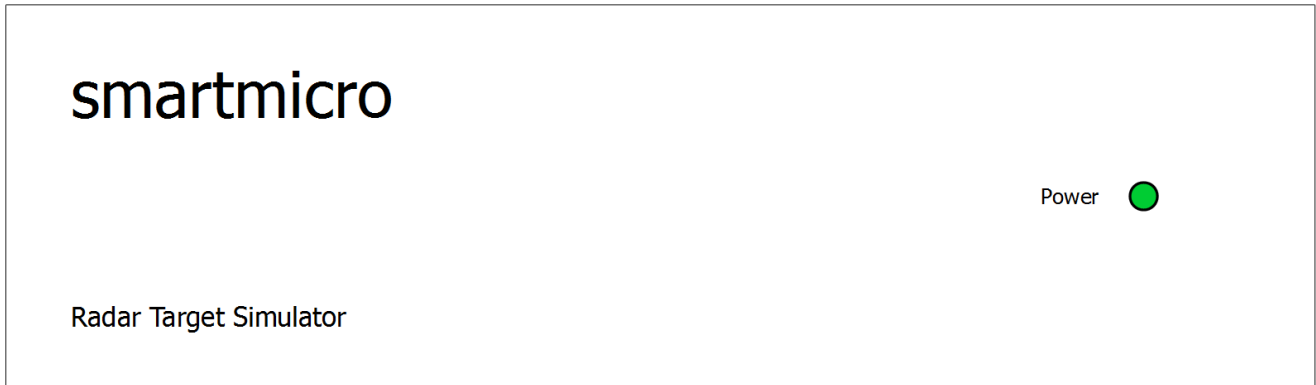

Front Panel

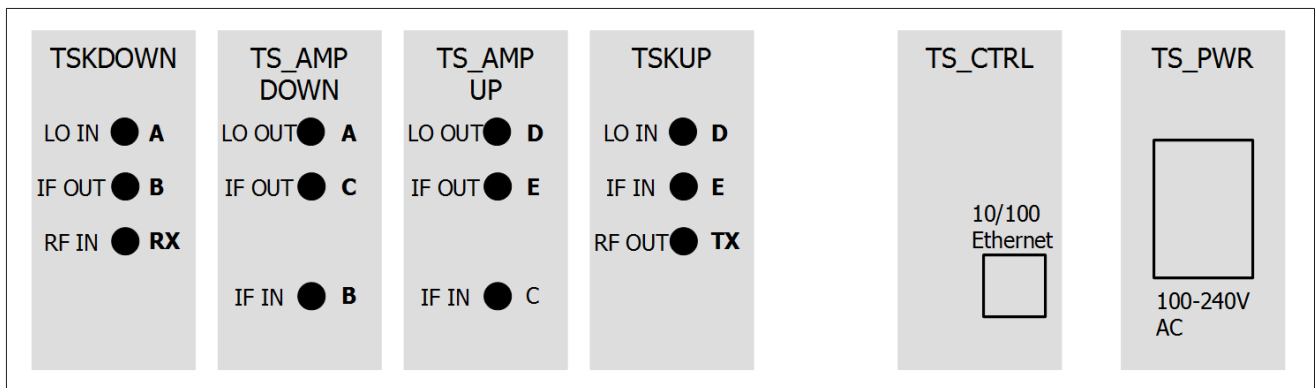

Rear Panel

All connections are made on the rear panel of the TSDG. A set of coax jumpers and instructions on what connections to make for common measurement setups are included with the unit.

5.4 Specifications

Absolute Maximum Ratings			
Input Power	20	dBm	RF IN
	20	dBm	IF IN
	20	dBm	LO IN
DC voltage	0	V	RF IN
	0	V	IF IN
	0	V	LO IN

CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.

Recommended Operating Conditions			
RF IN	-10	dBm, max.	
IF IN	-30	dBm, max.	
External IF attenuation	20	dB, min.	
TS_AMP DOWN: IF OUT to TS_AMP UP: IF IN	40	dB, max.	

Electrical Specifications for TSDG-0001xx			
T _A =25°C; RF IN power: -30dBm; external attenuation in IF path: 40dB; Test frequency: 24.125 GHz; L ₁ = L ₂ = L ₃ = L ₄ = 20 dB; RF IN to RF OUT			
RF Frequency Range	24 – 24.25	GHz	
Input Return Loss	-10	dB, typ.	RF IN
Input 1 dB Compression Point	-5	dBm, typ.	RF IN
Output Return Loss	-10	dB, typ.	RF OUT
Output 1 dB Compression Point	10	dBm, typ.	RF OUT
IF Frequency Range	6.4 – 6.65	GHz	
Input Return Loss	-10	dB, typ.	IF IN
Output Return Loss	-10	dB, typ.	IF OUT
Gain Ripple	±1	dB, typ.	
Attenuation Accuracy	± (2.4 + 5% * L)	dB, max.	L = L ₁ + L ₂ + L ₃ + L ₄ see section 5.5
Local Oscillator SSB Phase Noise			
10 kHz Offset	-85	dBc/Hz, max.	LO OUT, 17.6 GHz
100 kHz Offset	-110		
1 MHz Offset	-130		
Local Oscillator SSB Phase Noise			
10 kHz Offset	-95	dBc/Hz, typ.	LO OUT, 17.6 GHz
100 kHz Offset	-120		
1 MHz Offset	-140		
Non-harmonic spurs	-60	dBc, typ.	

CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.

Propagation Delay	8	ns, typ.	TSDG with 5" IF jumper; without external cabling or antennas
Simulated target distance	< 1	m, typ.	TSDG, using only one of two TS_AMPs
	< 2	m, typ.	TSDG with 5" IF jumper; without external cabling or antennas
	>1000	m	with fiber optic delay
Doppler Frequency Step	11.92	Hz	0.074 m/s
Doppler Frequency Accuracy	< 0.1%		
Max. Doppler Shift	±100	kHz	±2237km/h ±621m/s

Electrical Specifications for Individual Modules			
TSKDOWN Conversion Gain	-10	dB, typ.	
TS_AMP Maximum Gain	74	dB, typ.	
TS_AMP Attenuation Control Range	0 - 31.5	dB	Per attenuator L _x
	0 - 63	dB	Total per TS_AMP
TSKUP Conversion Gain	-10	dB, typ.	

Mechanical Specifications			
RF Interface	SMA-F or 2.92 mm		2.92 mm mates with SMA
IF Interface	SMA-F		
Weight	5	kg	
Dimensions	19	inch	Form Factor
	3	U	height (1 U = 44.45 mm)
	295	mm	depth


Environmental Specifications			
Temperature	+10 to +35°C	Operating	

CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.

Operating voltage	100 - 240	VAC	72W max., 50/60Hz
Warm-Up Time	120	Minutes	

5.5 Typical Loss Budget Calculation

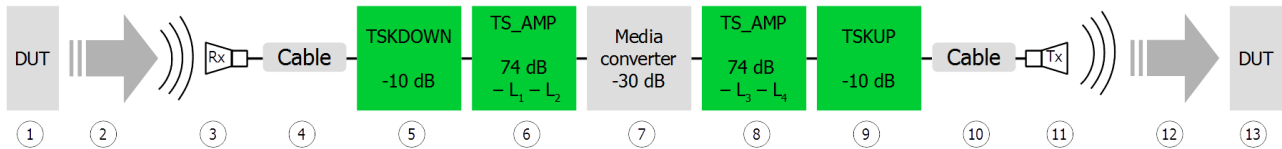

Nr.	Component	Gain	Power
1	DUT E.I.R.P.		+20 dBm
2	Free Space Loss 2m @ 24 GHz	-60 dB	-40 dBm
3	Antenna Gain	+10 dBi	-30 dBm
4	Cable Loss 5m, -3 dB/m @ 24 GHz	-15 dB	-45 dBm
5	TSKDOWN Conversion Gain	-10 dB	-55 dBm
6	TS_AMP Attenuator L ₁ (0 – 31.5 dB) Attenuator L ₂ (0 – 31.5 dB)	+74 dB -15 dB -15 dB	-11 dBm
7	Fiber optical media converter incl. cabling	-30 dB	-41 dBm
8	TS_AMP Attenuator L ₃ (0 – 31.5 dB) Attenuator L ₄ (0 – 31.5 dB)	+74 dB -15 dB -15 dB	3 dBm
9	TSKUP Conversion Gain	-10 dB	-7 dBm
10	Cable loss	-15 dB	-22 dBm
11	Antenna Gain	+10 dBi	-12 dBm
12	Free Space Loss	-60 dB	-72 dBm
13	DUT input power		-72 dBm

To prevent oscillation, it is important to make sure that the isolation between Tx and Rx antenna is larger than the sum of gains 4 – 10 (23 dB in this example).

CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.

5.6 Product ID

The product ID of every product consists of a name as an identifier and a 6 digit long product number plus a unique serial number for each build unit.

TSDG – 000100 00000000

TSDG – GGMMRR Serial Number

Product Name: TSDG

At first is the product name, which identifies the type of product.

Generation: GG

Then the first two digits stand for the generation of the product, which changes if a complete redesign has been done. The generation always starts with the number 00.

Modification: MM

The two modification digits stand for functional changes within parts of the unit. Units with the same modification number can be exchanged. The modification always starts with the number 00.

Modification	Functionality
00	24 GHz + 76-81 GHz bands supported
01	24 GHz band
02	76 – 81 GHz band

Revision: RR

A change in revision happens if parts of the design change without any functional change in the unit. For example if a new manufacturer is producing the product. The revision always starts with the number 00.

The first build unit of the instrument described in this document will have the product ID:

TSDG-000100 00000000

CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.

6 Important Legal Disclaimer Notice

All Product, Product specifications and data in this project documentation are subject to change without notice to improve reliability, function, design or otherwise.

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Smartmicro disclaims any and all liability for any errors, inaccuracies or incompleteness contained in this datasheet or in any other disclosure relating to the Product.

To the extent permitted by applicable law, Smartmicro disclaims (i) any and all liability arising out of the application or use of the Product or the data contained herein, (ii) any and all liability of damages exceeding direct damages, including - without limitation – indirect, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of suitability of the Product for a particular purpose.

Statements regarding the suitability of Products for certain types of applications are based on Smartmicro' knowledge of typical requirements that are often placed on Smartmicro' Products in generic/general applications. Such statements are, however, not binding statements about the suitability of Products for a particular/specific application. It is the customer/user's own responsibility to validate that the Product with the specifications described herein is suitable for use in its particular/specific application. Parameters and performance of the Products may due to particular/specific applications and due to particular/specific surroundings deviate from the statements made herein. Therefore, it is important that customer/user has thoroughly tested the Products and has understood the performance and the limitations of the Products before installing the Products for the final applications or before commercialization. Although Products are well optimized to be used for the intended applications stated herein, it must also be understood by the customer/user that the detection probability may not be 100 % and the false alarm rate may not be zero.

The information provided herein, relates only to the specific Product designated and may not be applicable when such Product is used in combination with other materials or in any process not defined herein. All operating parameters, including typical parameters, must be validated for each customer application by the customer/user's technical experts. Customers using or selling Smartmicro products not expressly indicated for use in such applications do so at their own risk.

This Product specification or data sheet does not expand or otherwise modify Smartmicro terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing by Smartmicro, the Products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Product could result in personal injury or death.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Smartmicro Product names and markings noted herein may be trademarks of their respective owners.

Please note that the application of the Product may be subject to standards or other regulations that may vary from country to country. Smartmicro does not guarantee that the use of Products in the applications described herein will comply with such regulations in any country. It is the customer/user's responsibility to ensure that the use and incorporation of Products complies with the regulatory requirements of their markets.

If any provision of this Disclaimer is, or is found to be, void or unenforceable under applicable law, that will not affect the validity or enforceability of the other provisions of this Disclaimer.

CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.

7 Contact

Address:

smart microwave sensors GmbH
In den Waashainen 1
38108 Braunschweig
Germany

Phone / Fax numbers:

Phone: +49-531-39023-0
Fax: +49-531-39023-599

Web / Email address:

Web: www.smartmicro.de
Email: info@smartmicro.de

CONFIDENTIAL AND PROPRIETARY

The Information contained in this document shall remain the sole exclusive property of s.m.s smart microwave sensors GmbH and shall not be disclosed by the recipient to third parties without prior consent of s.m.s smart microwave sensors GmbH in writing.